



# JOHN DEERE

## PowerTech™ **6068H** Diesel Engine Specifications

### PERFORMANCE DATA

#### Rated Power

Intermittent 225 hp (168 kW) @ 2400 rpm  
Continuous 203 hp (151 kW) @ 2400 rpm

#### Peak Torque

Intermittent 616 lb-ft (835 N.m) @ 1400 rpm


#### Fuel Economy

BSFC 0.367 lb/hp-hr (223 g/kWh) @ 2400 rpm

RATED BHP is the power rating for variable speed and load applications where full power is required intermittently.  
CONTINUOUS BHP is the power rating for applications operating under a constant load and speed for long periods of time.  
POWER OUTPUT is within + or - 5% at standard SAE J 1995 and ISO 3046.  
TIER 2 EMISSIONS CERTIFICATIONS: CARB, EPA, and EU.



### PERFORMANCE CURVE

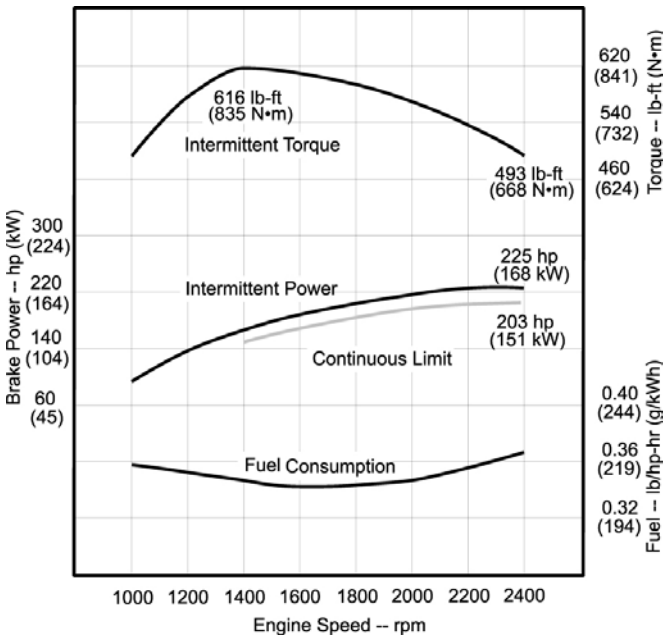

Tier 2 4-Valve engines shown  
Photographs may show non-standard equipment





# PowerTech™ 6068H Diesel Engine Specifications

## GENERAL DATA

Model	6068HF275	Aspiration	Air to Air
Number of Cylinders	6	Length - in. (mm)	44.2 (1123)
Displacement - L (cu.in)	6.8 (414)	Width - in. (mm)	25 (637)
Bore and Stroke - in. (mm)	4.19 x 5.0 (106 x 127)	Height - in. (mm)	40.8 (1036)
Compression Ratio	17.0:1	Weight - lb. (kg)	1294 (587)
Engine Type	In-line, 4-Cycle		

## DIMENSIONS

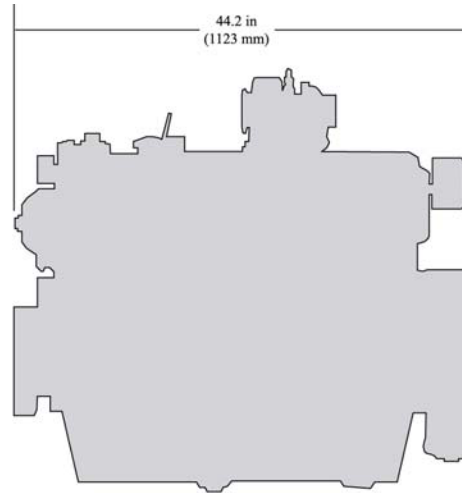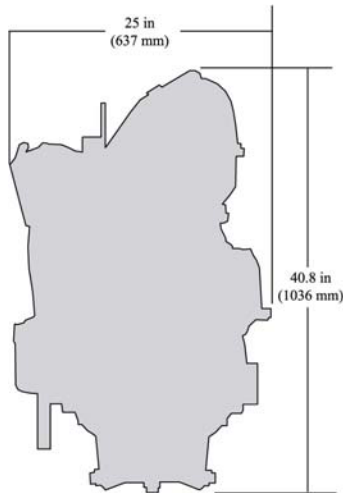

## FEATURES AND BENEFITS

### Dynamically Balanced Crankshaft

- Crankshafts are machined from a heat-treated, high carbon steel forging

### Forged-Steel Connecting Rods

- Unique 45-degree design permits the use of larger crankshaft connecting-rod bearings for increased durability

### Self-adjusting Poly-vee Fan Drive

- Self-adjusting, eight-groove, poly-vee fan drive provides multiple fan drive ratios and fan heights that can be matched to specific application requirements
- Poly-vee design provides more than twice the drive capacity of comparable vee-belts

### Replaceable Wet-Type Cylinder Liners

- Provides excellent heat dissipation
- Precision machined for long life

### Either-Side Service

- Engine installation and maintenance simplified and convenient by providing dipstick and oil filter options on both sides of the engine

### 500-Hour Oil Change

- Customers save significant costs on oil, filters, and labor with a 500-hour oil change interval

### Standard Gear Auxiliary Drive

- Standard gear auxiliary drive produces up to 50 hp (37 kW) for gear-driven accessories

### Mounting Points

- Standard front and side mounting points provide easy installation and application flexibility

### Electronic-Controlled Rotary Injection Pump

- Electronic-controlled rotary injection pump distributes the precise amount of fuel required by each cylinder at exactly the right time
- Electronic controls monitor engine speed and load to determine fuel timing

*Specifications and design subject to change without notice*



John Deere Power System  
3801 W. Ridgeway Ave.  
PO Box 5100  
Waterloo, IA 50704-5100  
Phone (800) 533-6446  
Fax (319) 292-5075

John Deere Power Systems  
Usine de Saran  
La Foulonnerie - B.P. 11013  
45401 Fleury-les-Aubrais Cedex-France  
Phone (33) 2 38 82 61 19  
Fax (33) 2 38 82 60 00