

# PowerTech™ 6081H Diesel Engine Specifications

## PERFORMANCE DATA

### Rated Power

Heavy Duty/Continuous 275 hp (205 kW) @ 2200 rpm


### Peak Torque

Heavy Duty 885 lb-ft (1200 N.m) @ 1500 rpm



### Fuel Economy

BSFC 0.357 lb/hp-hr (217 g/kWh) @ 2200 rpm

RATED BHP is the power rating for variable speed and load applications where full power is required intermittently.  
CONTINUOUS BHP is the power rating for applications operating under a constant load and speed for long periods of time.  
HEAVY DUTY - see application ratings/definitions, engine performance curves  
POWER OUTPUT is within + or - 5% at standard SAE J 1995 and ISO 3046.  
TIER 2 EMISSIONS CERTIFICATIONS: CARB, EPA, and EU.

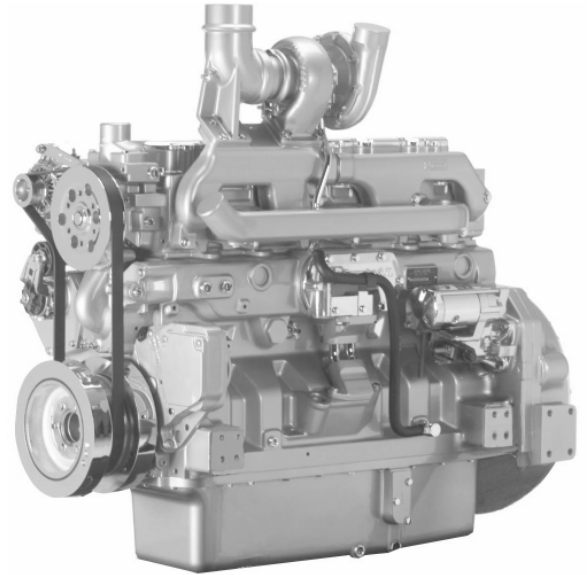

## PERFORMANCE DATA

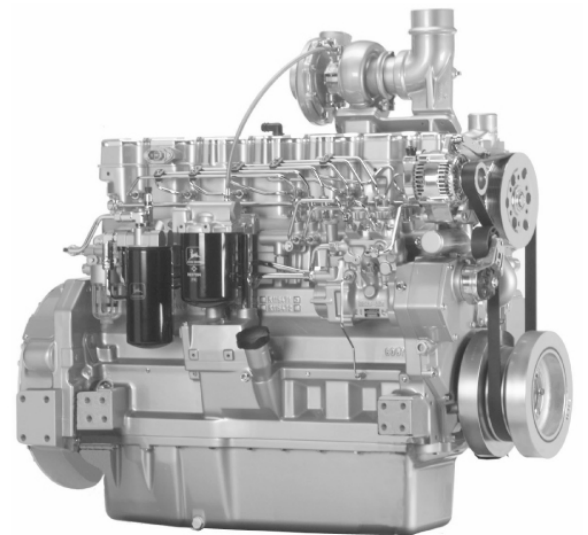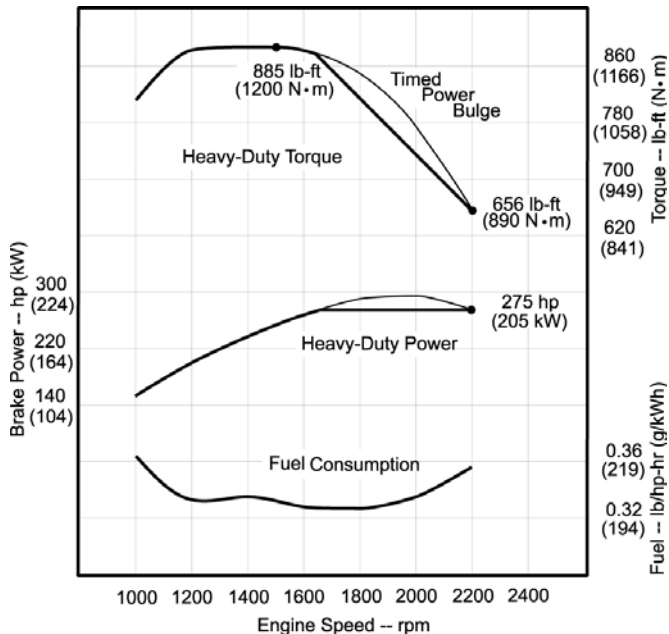


Photographs may show non-standard equipment

**PowerTech™**  
**6081H Diesel Engine**  
**Specifications**

**GENERAL DATA**

Model	6081HF070	Aspiration	Air-to-Air
Number of Cylinders	6	Length - in. (mm)	47.6 (1210)
Displacement - L (cu.in)	8.1 (496)	Width - in. (mm)	23.5 (599)
Bore and Stroke - in. (mm)	4.56 x 5.06 (116 x 129)	Height - in. (mm)	45.4 (1152)
Compression Ratio	15.7:1	Weight - lb. (kg)	1711 (776)
Engine Type	In-line, 4-cycle		

**DIMENSIONS**

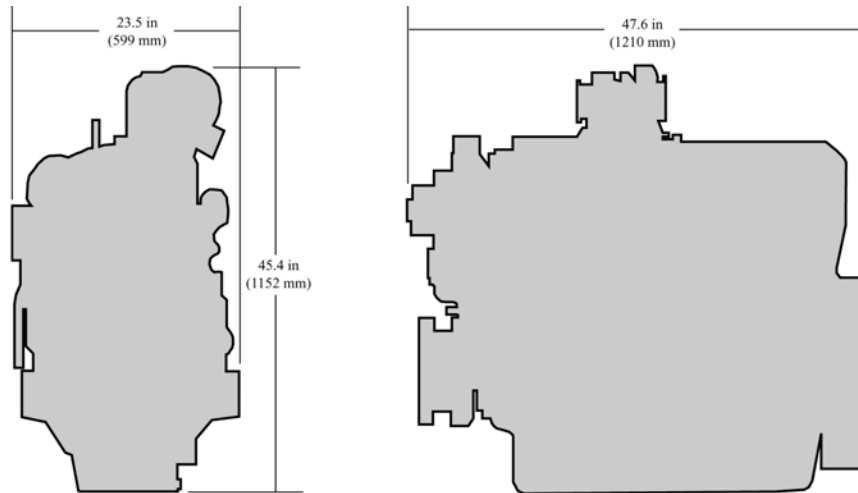

**FEATURES AND BENEFITS**

**Directed Top-Liner Cooling**

- Directing coolant to upper end of the liner reduces liner temperatures by up to 100 degrees F (54 degrees C), improving power cylinder durability and head gasket life, and reducing oil consumption and emissions

**SAE J1939 Standard Communication Link**

- Industry standard, which provides an interface with vehicle systems, like the transmission, hydraulics and various accessory drives minimizing machine complexity and reducing vehicle total installed cost

**John Deere Electronic Controls**

- John Deere electronically controlled fuel systems monitor critical engine functions and either derates or shuts down (override capability provided) an engine to prevent costly engine repairs
- Built-in controls eliminate need for costly add-on engine warning/shutdown systems and associated devices
- Service diagnostics and error codes automatically stored for later retrieval, increasing machine uptime
- Performance connector part of engine wiring harness which allows for programming of multiple power curves and droop or isochronous governor regulation

**Either-side service**

- Combination oil fill/dipstick available on either side of the engine, greatly simplifying engine installation

**Gear auxiliary drive**

- Left hand gear auxiliary drive available which provides up to 60 hp (45 kW), intermittent

**Self-adjusting poly-vee fan drive**

- Self-adjusting, eight-groove, poly-vee fan drive provides multiple fan drive ratios and heights that can be matched to specific application requirements
- Poly-vee fan design provides more than twice the drive capacity of comparable vee-belts

**Additional Features**

- 8.1 engine includes gear-driven water pump, improved accessory mounting, gear-driven auxiliary drive, self-adjusting poly-vee fan drive, air compressors, and high-mount A/C compressor options

**Optional Rear PTO**

- Rear PTO is an integral part of the flywheel housing and provides a means for driving medium/large hydraulic pump(s), and air compressors
- Available in SAE #1 or SAE #2 flywheel-housing configuration for dry applications
- 1.3:1 output ratio allows the use of smaller, higher speed hydraulic pumps
- Gear train, pump drives, and flanged output drive are capable of up to 300hp/224kW (750 ft-lbs/1018 N.m torque) on an intermittent basis
- Right-hand side pad standard with optional left-hand side pad
- Standard SAE "C" and optional "B", "D" mounting pads and flange output drives

*Specifications and design subject to change without notice*



John Deere Power Systems  
 3801 W. Ridgeway Ave.  
 PO Box 5100  
 Waterloo, IA 50704-5100  
 Phone (800) 533-6446  
 Fax (319) 292-5075

John Deere Power Systems  
 Usine de Saran  
 La Foulonnerie - B.P. 11013  
 45401 Fleury-les-Aubrais Cedex-France  
 Phone (33) 2 38 82 61 19  
 Fax (33) 2 38 82 60 00